

Designed for living, made for life.

MANUFACTURED & DESIGNED IN AUSTRALIA



Iconic woodheaters for a contemporary world

Immerse yourself in the dynamic range of Eureka woodheaters. Proudly crafted over four generations in country Victoria.

Freestanding Woodheaters

| Discovery Series | 4 |
|-------------------------------|----|
| Radiant Series | 7 |
| Selection Series | 12 |
| Insert Woodheaters | |
| Discovery Series | 14 |
| Selection Series | 16 |
| Double Sided Range | |
| Double Sided Range | 20 |
| Zero Clearance Installation | 22 |
| Elevated Insert Installations | 22 |
| Specifications | 23 |





MANUFACTURED & DESIGNED IN AUSTRALIA







All of our heaters are built to last. That's why we guarantee all of our fireboxes to last 10 years*. *Excludes Eureka Cooker



With clever design features and Eureka's pre-heated primary air technology, the freestanding Discovery Series is certain to impress. Loading firewood has never been easier, with the flat-window models encompassing a tall ergonomic pedestal. Should you simply wish to be absorbed by the flickering flames, the elegant bay window models will provide a stunning view.







| | Opal 180 | Capacity 180m ² Efficiency 69%† | دین Log Width 490mm Emissions 0.9g/kg | Flue Size 150mm Output 14kW‡ |
|--|--------------------|---|---|---------------------------------------|
| The second sec | Miner 260 | Capacity 260m ² Efficiency 72%† | Einissions 1.4g/kg | Flue Size 150mm Output 21kW‡ |
| Tall pedestal for easy loading 10 Year firebox warranty | Garnet 320 | Capacity 320m ² Efficiency 65%† | Emissions 1.3g/kg | Flue Size 175mm Output 24kW‡ |

Freestanding Woodheaters





Sure to become a design icon — the new, sleek and modern Eureka Radiant series provides all the benefits of radiant style wood heating. Perfect for homes with poor insulation or high ceilings, radiant heaters emit heat directly through the outer surface of the firebox, rapidly warming your space.

| NEW FOR 2020 | Jade 160 | MA Refer to wy | COMING ARCH 202 ww.eurekaheatin dates & specifica | 20 g.com.au |
|--|---------------|---|--|------------------------------|
| *Pictured above without standard rear heat shield | Amber 240 | Capacity 240m ² Efficiency | 도조) Log Width 535mm Emissions | Flue Size 150mm Output |
| Firebrick lined | | 68%† | 0.9g/kg | 12kW‡ |
| Dual baffle system featuring 8mm primary baffle | | \bigotimes | | |
| "Boost Air" inlet for easier ignition Heavy duty cast iron door | Jasper 320 | Capacity 320m ² | Log Width 570mm | Flue Size 150mm |
| \oplus 10 Year firebox warranty | | Efficiency 66%† | Emissions 1.0g/kg | Output 14kW‡ |

Step into the warmth of a Eureka



Freestanding Woodheaters



Nugget

The Eureka Nugget is known all around Australia for its functionality and hardworking nature. This tough as nails radiant style unit has an exceptionally deep firebox, allowing you to fit logs that similar sized units would be envious of. The Nugget also incorporates a radiant cook top for your pots and pans, as well as a raised shelf for simmering. The Eureka Nugget truly is a tireless contributor to any Aussie home.

- Boil & simmer on top or back shelf
- Firebrick lined
- Extra deep firebox for easy loading
- ⊕ 10 Year firebox warranty
- ⊕ Optional 3-speed fan

| \bigotimes | | |
|-----------------|------------------|------------------|
| Capacity | Log Width | Flue Size |
| 180m² | 485mm | 150mm |
| Efficiency | Emissions | Output |
| 69%† | 1.1g/kg | 16kW‡ |



Cooker

The Eureka Cooker's hot plate gives the versatility of stove top cooking, whilst the functional oven roasts or bakes your favourite winter treats. The firebox itself provides a radiant heating capacity of up to $120m^2$, making the Cooker a superb addition to your kitchen or family room whatever the season.

- Hot plate for boiling/ simmering
- \oplus Oven for baking
- Firebrick lined
- 🕀 8mm steel baffle plate

| \bigotimes | | |
|-------------------|------------------|------------------|
| Capacity | Log Width | Flue Size |
| 120m ² | 490mm | 150mm |
| Efficiency | Emissions | Output |
| N/A | N/A | N/A |



Woodstock

The Eureka Woodstock makes your wood storage simple, providing you with ample space to store your logs for those next few burns. Whilst utilising the same firebox as the Eureka Opal, the Woodstock has the added benefit of being easier to load, as it is taller in size.

- ③ 3-Speed fan
- ① Firebrick lined
- 🕀 8mm steel baffle plate
- + Large wood storage box
- + Tall unit & easy to load
- \oplus Identical firebox to opal
- 🕀 10 Year firebox Warranty

| \bigotimes | (<u> </u> | |
|-----------------|------------------|------------------|
| Capacity | Log Width | Flue Size |
| 180m² | 490mm | 150mm |
| Efficiency | Emissions | Output |
| 69%† | 0.9g/kg | 14kW‡ |

Timeless functionality... enduring elegance

Eureka



Why compromise between classic and modern style! The Selection Series range is perfect for those looking to invest in a striking centre piece for their home, guaranteeing dependable heat for many winters to come.





- ⊕ Sleek & modern design
- 3-Speed fan with thermostatic switch
- \oplus Cast iron lined
- ⊕ 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- \oplus Dual pre-heated primary air
- \oplus Dual-action handle latch

| Pearl | \bigotimes | | |
|--------------|-------------------|-------------------|------------------|
| Freestanding | Capacity | Log Width | Flue Size |
| | 260m ² | 540mm | 150mm |
| 200 | Efficiency | Emissions | Output |
| | 80%† | 0.9g/kg | 16kW‡ |
| Ruby | \bigotimes | (<u>= :=-(</u>) | |
| Freestanding | Capacity | Log Width | Flue Size |
| 330 | 330m ² | 595mm | 150mm |
| 330 | Efficiency | Emissions | Output |
| | 76%† | 1.3g/kg | 17kW‡ |



- ⊕ Sleek & modern design
- \oplus 1200mm bench option
- 3-Speed fan with thermostatic switch
- \oplus Cast iron lined
- \oplus 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- \oplus Dual pre-heated primary air
- \oplus Dual-action handle latch

| Pearl | \otimes | | |
|----------------|--------------------|-----------------------------|---------------------------|
| Modular 260 | Capacity 260m² | Log Width 540mm | Flue Size 150mm |
| 200 | Efficiency 80%† | Emissions 0.9g/kg | Output 16kW‡ |
| Ruby | | (<u> </u> | |
| Modular | Capacity | Log Width | Flue Size |
| 330 | 330m ² | 595mm | 150mm |
| 550 | Efficiency 76%† | Emissions 1.3g/kg | Output 17kW‡ |

Insert Discovery Series

Turn a draughty open fireplace into a highly efficient heat source! Designed with functionality, efficiency and durability in mind, the Discovery series inbuilt range will keep you warm through the coldest, darkest winters.



| | | \bigotimes | | |
|-----------------------------------|---------------------|--------------------------------------|-----------------------------|---------------------------|
| | O pal 160 | Capacity 160m² | Log Width 490mm | Flue Size 150mm |
| | | Efficiency 72%† | Emissions 0.9g/kg | Output 14kW‡ |
| | | \bigotimes | (<u>E</u> <u></u>) | |
| Ernia | Stockade 240 | Capacity 240m ² | Log Width 545mm | Flue Size 150mm |
| (+) 3-Speed fan | | Efficiency 67%† | Emissions 1.5g/kg | Output 17kW‡ |
| Firebrick lined | | | | |
| ④ 8mm steel baffle plate | | \bigotimes | (<u>=</u>] | |
| \oplus 10 Year firebox warranty | Garnet | Capacity | Log Width | Flue Size |
| ⊕ Zero clearance compatible | 280 | 280m ² | 620mm | 175mm |
| | | Efficiency 65%† | Emissions 1.4g/kg | Output 21kW‡ |

Victorian 260



- ③ 3-Speed fan
- ⊕ Cast iron lined
- \oplus 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- Alloy fascia & timber mantle option (pictured, left)
- \oplus Zero clearance compatible

| \bigotimes | (<u> </u> | |
|-------------------|------------------|------------------|
| Capacity | Log Width | Flue Size |
| 260m ² | 570mm | 150mm |
| Efficiency | Emissions | Output |
| 64%† | 1.0g/kg | 15kW‡ |



Insert **Selection Series**

The apex of Australian wood heating! This visually striking series offers the very best of Eureka design, functionality and endeavour. Their narrow fascia's allow the heater to sit neatly within your wall or fireplace. Take comfort as the warmth is generously distributed throughout your home.





- ⊕ Sleek & modern design
- 3-Speed fan with thermostatic switch
- \oplus Cast iron lined
- 🕀 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- \oplus Dual pre-heated primary air
- \oplus Dual-action handle latch
- Zero Clearance Option features "flush-fit fascia (3mm)"

Pearl 240 \bigcirc

Capacity

240m²

Efficiency

74%†

R

Capacity

300m²

Efficiency

68%†

Ruby 300

| Log Width |
|-----------|
| 540mm |
| Emissions |
| 1.0g/kg |
| |
| |
| Log Width |

595mm

Emissions

1.4g/kg

(E-371)

Flue Size

150mm

Output

12kW‡

Flue Size

150mm


Output

15kW‡





The perfect work-life balance

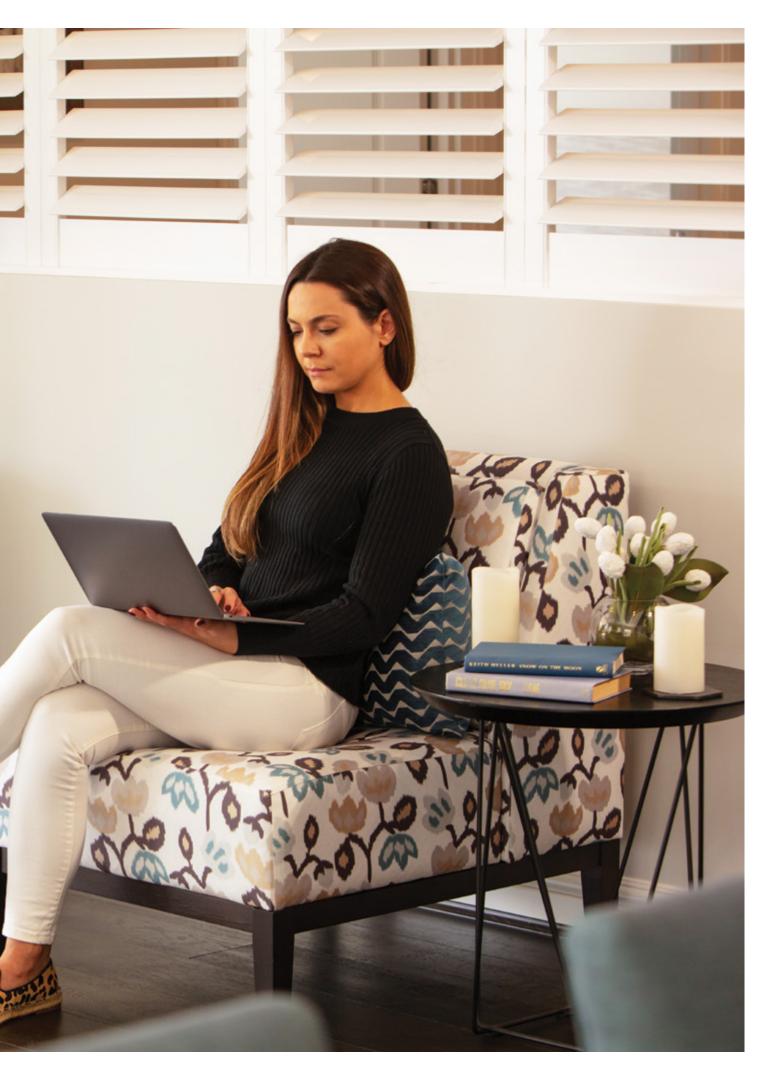

Double Sided Range

These heaters truly provide a heart for any home. Whether you're looking for a powerful heating source, a luxurious centrepiece, or the flamed vitality of a wood burning heater — this range gives incredible flexibility and warmth in multiple rooms (capable of heating up to 420m²).


For further double sided range installation options, such as dual room functionality, speak to your local dealer, or download the Double Sided Reference guide at www.eurekaheating.com.au



*Gold door optional

Duet 400

- ⊕ 2x 3-Speed fans
- Firebrick lined
- 🕀 8mm steel baffle plate
- ① 10 Year firebox warranty
- Through-wall & Masonry cavity options available





Jewel 420 (Freestanding)

- ⊕ 2x 3-speed fans with thermostatic switch
- \oplus Cast iron lined
- 🕀 8mm steel baffle plate
- ⊕ 10 Year firebox warranty
- \oplus Dual-action handle latch
- \oplus Dual pre-heated primary air
- Through-wall options available

| \bigotimes | | |
|-------------------|------------------|------------------|
| Capacity | Log Width | Flue Size |
| 420m ² | 530mm | 175mm |
| Efficiency | Emissions | Output |
| 62%† | 1.2g/kg | 25+kW‡ |





Jewel 400 (Insert)

- 2x 3-speed fans with thermostatic switch
- \oplus Cast iron lined
- ⊕ 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- \oplus Dual-action handle latch
- \oplus Dual pre-heated primary air
- \oplus Masonry installation only

Jewel 420 (Modular)

- ⊕ 2x 3-speed fans with thermostatic switch
- \oplus Cast iron lined
- \oplus 8mm steel baffle plate
- \oplus 10 Year firebox warranty
- Dual-action handle latch
- ⊕ Dual pre-heated primary air
- ⊕ 1200mm bench option

| \bigotimes | | |
|-------------------|------------------|------------------|
| Capacity | Log Width | Flue Size |
| 420m ² | 530mm | 175mm |
| Efficiency | Emissions | Output |
| 62%† | 1.2g/kg | 25+kW‡ |

Log Width

530mm

Emissions

1.2g/kg

Flue Size

175mm

Output

25+kW‡

Capacity

400m²

Efficiency

62%†




21

Designed for living, made for life.

Zero Clearance Installation

Don't have a brick chimney, but love the sleek look of a Eureka Insert? All of the Eureka Inserts (exc. double sided range) are Zero Clearance Install compatible using the relevant Eureka Zero Clearance Cabinet. This allows for a broader range of ways to incorporate a Eureka Insert heater into your living space.

Step 1



Step 2



Step 3



Minimum Zero Clearance Framing Dimensions


| Model | Н | w | D |
|----------------|------|------|-----|
| Opal, Stockade | 810 | 916 | 565 |
| Victorian | 1063 | 1036 | 595 |
| Garnet | 868 | 1035 | 570 |
| Pearl | 1000 | 915 | 635 |
| Ruby | 1000 | 1055 | 610 |

Specifications detail minimum framework opening (inclusive of clearance from Zero Box to combustible framework)


Elevated Insert Installations

Raising your Eureka Insert installation above floor level? You may be able to reduce your minimum hearth depth to 300mm. Refer to the following table as a guide on how high your unit must be raised to achieve the reduced hearth depth. A Zero Clearance Cabinet allows for safe installation into timber framework with minimal clearances to the unit. Once your framework is built, it is as simple as cladding the front face with a cement sheet or equivalent, and your Eureka Insert heater is safely installed as a focal point to your room.

Minimum framing dimensions are an indicative guide only. **DO NOT** begin any construction prior to consulting the full Zero Clearance Installation guide for the relevant unit. Full Installation instructions available at www.eurekaheating.com.au




| | REF | OP | AL | ѕтос | KADE | GAR | NET | PE | ARL | RUBY | |
|---|-----|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| Hearth width | × | 890mm | n (min.) | 950mn | n (min.) | 1035mi | m (min.) | 945mr | n (min.) | 1000mm (min.) | |
| Hearth raised | Y | 0mm | 155mm (min.) | 0mm | 132mm (min.) | 0mm | 197mm (min.) | 0mm | 175mm (min.) | 0mm | 140mm (min.) |
| Hearth depth from front of fascia | z | 530mm (min.) | 300mm (min.) | 510mm (min.) | 300mm (min.) | 610mm (min.) | 300mm (min.) | 530mm (min.) | 300mm (min.) | 530mm (min.) | 300mm (min.) |



Freestanding Specifications

| Dimensions & clearances | Flue type | Overall dimensions width/height/depth | | | Back of Woodheater to Flue Centre | | Clearance Combusti | | Minimum hearth size width/depth/thickness | | | |
|-------------------------|---------------------------|--|------|--------|--------------------------------------|-------------|-----------------------|-----------------|--|----------------|--------|------------------------|
| Freestanding models | Solid / perforated | w | н | H D mm | | Rear | Side | Side Corner | | D | т | mm in front of unit |
| Jade Jade | Perforated Half Shield | | | COMI | NG MARCH 2020 — Ref | er to www.e | eurekahe | ating.com.au fo | or updat | tes & specific | ations | |
| Amber | Perforated | 640 | 730 | 502 | 176 | 250* | 750 | 500 / 350** | 820 | 1060 | 24 | 550 |
| Amber | Half Shield | 640 | 730 | 502 | 176 | 300 | 825 | 475 / 300** | 820 | 1060 | 24 | 550 |
| Jasper | Perforated | 675 | 770 | 557 | 196 | 200* | 825 | 550 / 425** | 820 | 1140 | 30 | 600 |
| Jasper | Half Shield | 675 | 770 | 557 | 196 | 350 | 900 | 575 / 475** | 820 | 1140 | 30 | 600 |
| Opal | Perforated | 650 | 800 | 508 | 180 | 125* | 325 | 150 | 890 | 960 | 12 | 400 |
| Miner | Perforated | 710 | 937 | 570 | 180 | 150* | 400 | 175 | 950 | 1050 | 18 | 400 |
| Garnet | Perforated | 782 | 1008 | 570 | 180 | 150* | 450 | 200 | 1020 | 1100 | 20 | 450 |
| Emerald | Perforated | 655 | 745 | 610 | 170 | 150 | 450 | 125 | 900 | 1070 | 4.5 | 300 |
| Onyx | Perforated | 775 | 795 | 595 | 165 | 100 | 330 | 50 | 1170 | 1020 | 4 | 300 |
| Solitaire | Perforated | 850 | 825 | 620 | 180 | 100* | 425 | 100 | 960 | 1075 | 6 | 450 |
| Nugget | Perforated | 610 | 660 | 650 | 175 | 50 | 550 | 170 | 770 | 910 | 9 | 300 |
| Cooker | Perforated | 650 | 865 | 560 | 110 | 175 | 350 | 200 | 890 | 1095 | 12 | 350 |
| Woodstock | Perforated | 660 | 870 | 508 | 180 | 175 | 400 | 225 | 890 | 985 | 6 | 350 |
| Pearl | Solid/Perforated | 690 | 765 | 548 | 205 | 155/50* | 325 | 50/75 | 945 | 1000/895 | 9 | 300 |
| Ruby | Solid/Perforated | 748 | 828 | 548 | 205 | 50* | 325 | 50 | 1000 | 895 | 9 | 300 |
| Duet | Perforated | 810 | 792 | 810 | N/A | N/A | 350 | N/A | 1000 | 1800 | 12 | 500 |
| Jewel | Solid/Perforated | 695 | 765 | 745 | N/A | N/A | 330 | N/A | 940 | 1590 | 6 | 460 |


* Standard flue shield kit must be installed to achieve minimum rear wall clearance (included in woodheaters, excluding Jade, Amber and Jasper) ** Requires additional side wing heat shields to achieve minimum corner clearance (purchased separately)



Modular Specifications

| Dimensions & clearances | Flue type | Overall dimensions width/height/depth | | | Back of Woodheater to Flue Centre | | arance t nbustible | | Minimum hearth size width/depth/thickness | | | | |
|-------------------------|-----------------------|--|-------|-----|--------------------------------------|---------|-----------------------|--------|--|----------|-----|------------------------|--|
| Modular models | Solid / perforated | w | W H D | | mm | Rear | Side | Corner | w | D | т | mm in front of unit | |
| Pearl | Sol. / Perf. | 690 | 635 | 548 | 205 | 155/50* | 325 | 50/75 | 945 | 1005/900 | 140 | 330 | |
| Ruby | Sol. / Perf. | 748 | 676 | 548 | 205 | 50* | 325 | 50 | 1000 | 895 | 140 | 330 | |
| Jewel | Sol. / Perf. | 695 | 653 | 745 | N/A | N/A | 475 | N/A | 940 | 1890 | 32 | 570 | |
| Pearl w/ Bench | Sol. / Perf. | 690 | 635 | 548 | 205 | 155/50* | 325 | 50/75 | 945 | 1005/900 | 9 | 330 | |
| Ruby w/ Bench | Sol. / Perf. | 748 | 676 | 548 | 205 | 50* | 325 | 50 | 1000 | 895 | 9 | 330 | |
| Jewel w/ Bench | Sol. / Perf. | 695 | 653 | 745 | N/A | N/A | 475 | N/A | 940 | 1375 | 6 | 330 | |
| Pearl/Ruby Bench | - | 1200 | 280 | 550 | - | - | - | - | - | - | - | - | |
| Jewel Bench | - | 1200 | 280 | 775 | - | - | - | - | - | - | - | - | |

* Standard flue shield kit must be installed to achieve rear wall clearance (included in woodheater)

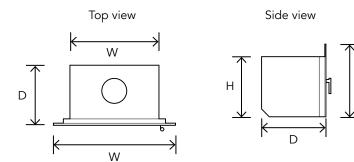

Insert Specifications

| Dimensions & Overall dimensions clearances width/height/depth | | | | | lear casin limensior | | | ince to comb m base of ap | | Back of fascia to flue centre | | | | |
|--|------|-----|-----------------|----------|---------------------------|-----|------|------------------------------|--------------------|-------------------------------------|-------------|-------|--------------------------|-----|
| | | | | | | | | | | Mas | onry instal | ation | ZCC install | |
| Insert Models | w | н | Fascia Depth | w | н | D | Side | To Mantle Shelf | To Breast Plate | w | D | т | mm in front of ZCB*** | mm |
| Opal | 882 | 750 | 42 | 570 | 595 | 365 | 50 | 1100 | 1040 | 890 | 530* | 12 | 570* | 232 |
| Stockade | 922 | 758 | 42 | 631 | 635 | 430 | 50 | 1390 | 1340 | 950 | 510* | 12 | 550* | 296 |
| Garnet | 994 | 828 | 42 | 700 | 706 | 430 | 50 | 1545 | 1545 | 1035 | 610* | 18 | 650* | 295 |
| Victorian | 1028 | 730 | 60 | 665 | 630 | 475 | 150 | 1225 | 975 | 1000 | 600* | 18 | 660* | 300 |
| Pearl Masonry | 855 | 640 | 16 | 751 | 595 | 484 | 55 | 1500** | 1410 | 945 | 550* | 18 | 550* | 326 |
| Pearl ZC | 850 | 674 | 3 | Refer to | Refer to ZC Install Guide | | 55 | 1500** | 1410 | 945 | N/A | 18 | 550* | N/A |
| Ruby Masonry | 935 | 705 | 16 | 808 | 651 | 484 | 35 | 1500** | 1410 | 1000 | 520* | 18 | 520* | 326 |
| Ruby ZC | 930 | 736 | 3 | Refer to | Refer to ZC Install Guide | | 35 | 1500** | 1410 | 1000 | N/A | 18 | 520* | N/A |
| Jewel | 875 | 692 | 16 | 751 | 644 | 708 | 205 | 1127 | 1127 | 940 | 1890* | 32 | 570* | 354 |

* Minimum hearth depth in front of unit can be reduced by raising the appliance above combustible materials

(Consult your local dealer and/or page 22 of this brochure) ** Mantle deflector required to achieve mantle clearance (included with woodheater)

*** Hearth must also be installed beneath ZCC - refer to install guide for exact specifications

Notes: ‡ All KW Outputs quoted are Peak Power. † All Efficiencies quoted are Peak Efficiency %. All dimensions are in mm. Dimensions and clearances shown are for reference only. Refer to the Owner's Manual for exact specifications prior to installation.

All information in this brochure was correct at the time of printing, February 2020, however Eureka Woodheating reserves the right to change specifications without notice. Colours shown are as close as printing method allow. Installation should be carried out by a qualified installer. All fireplace inserts must be installed into a masonry chimney or Eureka Zero Clearance Cabinet, and be fully flued.



Your local Eureka dealer









AF Gason Pty Ltd Phone: 03 9763 2700 Fax: 03 9763 0836 heating@gason.com.au

www.eurekaheating.com.au